



P.O.Box: 14155 – 5345 ,Tehran , Iran  
www.3pmasterbatch.com

## Technical Data sheet

### Slip agent + Anti Block


#### 1. Identification of the Preparation

Product Type: Slip agent + Anti Block  
Product Name: Slip  
Appearance: Granule  
Company: 3P

#### 2. Product Description

As slip agent, fatty acid amides are normally used. During processing they are solubilized in the amorphous melt, but as the polymer cools and crystallizes the fatty acid amides are squeezed out forming a lubricating layer at the polymer surface. The addition of slip agents can prevent film sticking and pulling helping to increase throughput.

<i>Property</i>	<i>Units</i>	<i>Value</i>
Carrier Resin		LDPE
Carrier Resin MFI	gr/10 min	2
Density	gr/cm <sup>3</sup>	0.98
Oleamide	%	12
AntiStatic	%	1

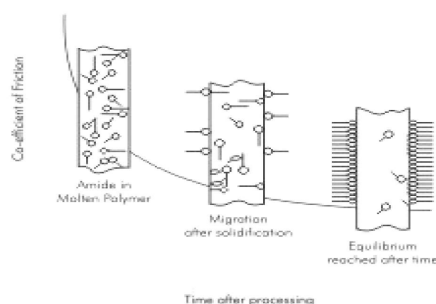

#### 3. Packaging

Slip bags should be stored in a dry and cool place below 35°C, protected from sunlight & tightly closed to avoid contamination .

Slip is packed in special 20kg bags.